


# GWX 245

## standard wax ribbon

### Product Description

This economy GoDEX ribbon grade ensures a dense black print with sharp edges on substrates ranging from vellum, uncoated and coated paper, to pre-printed and glossy label materials. GWX 245 prints well up to 10ips whilst requiring little energy and its protective back coating will extend the life time of your print heads significantly. GWX 245 is anti-static, offers proper scratch- and smear resistance and meets the ISEGA standard for use in food processing environments. Thanks to these properties it is a perfect, cost-efficient replacement for most if not all wax grades you may have been using so far.

### Performance Properties

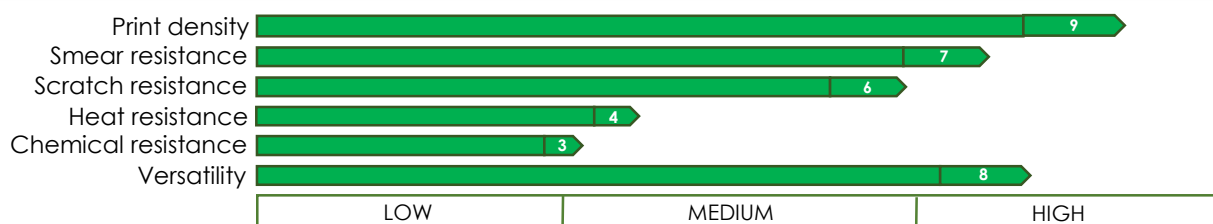

### Specifications

|                               |                  |
|-------------------------------|------------------|
| Ink Type                      | Wax              |
| TPH Compatibility             | Flathead         |
| Ink melting point             | 65°C / 149°F     |
| Printing speed                | Up to 10ips      |
| Base film material; thickness | PET; 4.5µ ± 0.1µ |
| Ink thickness                 | 2.8µ ± 0.2µ      |
| Total thickness               | 7.6µ ± 0.3µ      |
| Colours                       | Black            |

### Storage Conditions

|             |                                  |
|-------------|----------------------------------|
| Temperature | 5°C to 35°C (41F to 95F)         |
| Humidity    | 10% to 85% relative humidity     |
| Light       | Avoid direct sunlight            |
| Shelf life  | > 24 months from production date |

### Recommended Substrates:

Vellum, uncoated and coated paper, glossy paper, UV-varnished paper, flood-coated paper, polypropylene- and polyethylene coated paper, Kimdura®, Valeron®, hang tags

### Applications:



RFID



Manufacturing



Logistics



General  
Labelling



Global



Healthcare



Retail



Food






# GWX 265

premium wax ribbon

### Product Description

This resin-enhanced wax grade offers superior density even at the highest speeds. Its unique composition renders your printouts the kind of durability that is usually only achievable with wax-resin ribbons. Due to its perfect heat conducting characteristics, little energy is required. The low heat level required and its print head protecting back coating will extend the life time of your printer's print head significantly. GWX 265 has an anti-static ink formula and it offers the best smear and scratch resistance a wax ribbon can. Like all our ribbons, GWX 265 complies with ISEGA for use in food processing environments. GWX 265 is truly in a class of its own!

### Performance Properties

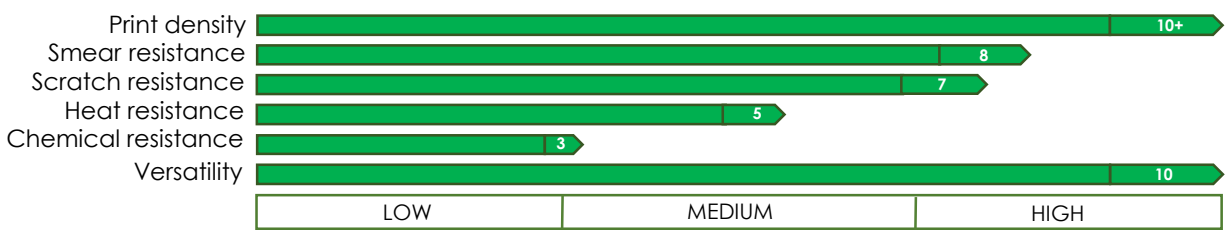

### Applications:

  
RFID

  
Manufacturing

  
Logistics

  
General Labelling

  
Global

  
Healthcare

  
Retail

  
Food



### Specifications

|                               |                    |
|-------------------------------|--------------------|
| Ink Type                      | Resin enhanced wax |
| TPH Compatibility             | Flathead           |
| Ink melting point             | 65°C / 149°F       |
| Printing speed                | Up to 14ips        |
| Base film material; thickness | PET; 4.5µ ± 0.1µ   |
| Ink thickness                 | 3.3µ ± 0.2µ        |
| Total thickness               | 8.6µ ± 0.3µ        |
| Colours                       | Black              |

### Storage Conditions

|             |                                  |
|-------------|----------------------------------|
| Temperature | 5°C to 35°C (41F to 95F)         |
| Humidity    | 10% to 85% relative humidity     |
| Light       | Avoid direct sunlight            |
| Shelf life  | > 24 months from production date |

### Recommended Substrates:

Vellum, uncoated and coated paper, glossy paper, UV-varnished paper, flood-coated paper, polypropylene- and polyethylene coated paper, Kimdura®, Valeron®, hang tags

